



HTC One Mini Rear Case Replacement

Use this guide to replace the rear case of your HTC One Mini.

Written By: Chris Jose





TOOLS:

- [iOpener](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — iOpener Heating




- Use the iOpener to melt the glue off of the top and bottom speaker grills.

Step 2 — Remove Speaker Grills



- Use the blue plastic opening tool to pry and remove the bottom speaker grill.

Step 3 — Remove Screw

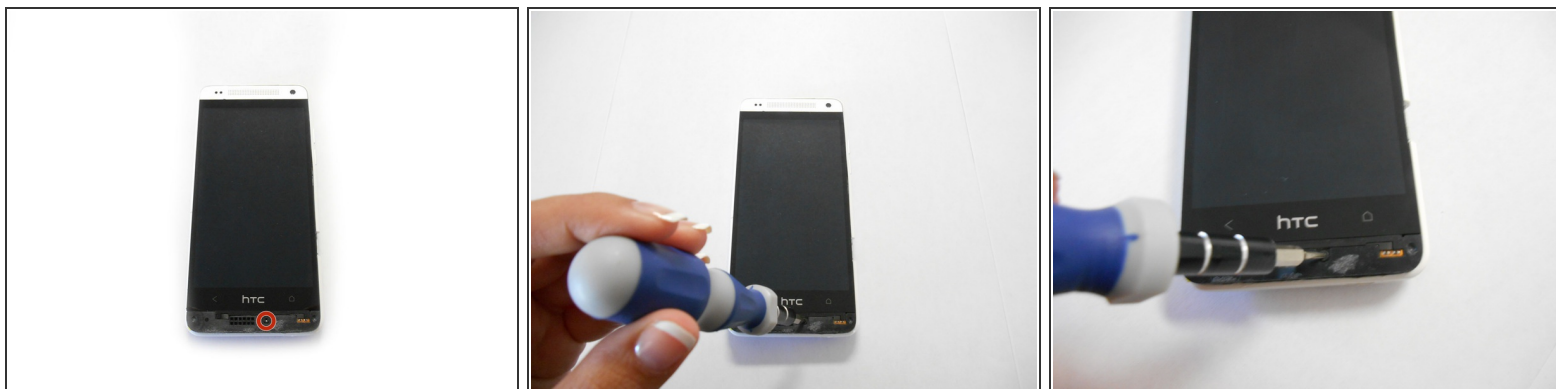

- Remove the screw under speaker grill using a T6 Torx screwdriver.

Step 4



- Wedge the plastic opening tool between the screen and the edge of the case.
- Use force to pry and separate the rear panel.

Step 5 — Separate Rear Case



- Separate the rear panel from the phone.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-11-21 12:41:35 AM.